

BICKNELL

Racing Products

BRP 4399- TORSION ROLLER TOOL


Warning the torsion arm is loaded and has considerable force on it. Never attempt to work on the roller and or torsion arm unless you are positive that the handle is over centre and locked against the stopper bolt. Always double check all hook up points (torsion bar safety bolt and upper birdcage spacer) after tightening the tool to make sure tool is secure and has no chance of slipping off. Never place your hands or fingers in between rollers and torsion arms as bodily injury could occur. Always wear safety glasses and keep face and eyes at a safe distance from handles and torsion arms when using this tool.

OPERATION

- 1 Hook the aluminum end over the safety bolt nut and the top steel hook over the top spacer on the birdcage.
- 2 You will have to adjust the length of the steel hook to allow the handle to hit stopper bolt but still take the tension off of the roller.
- 3 Push the handle down until it locks against the bolt, check for clearance between the torsion arm and the roller.
- 4 Double check all hookup points.
Change roller location.

MAINTENANCE

Before every use, make sure all hardware is tight.
Periodically take bolt out and grease the cup and ring

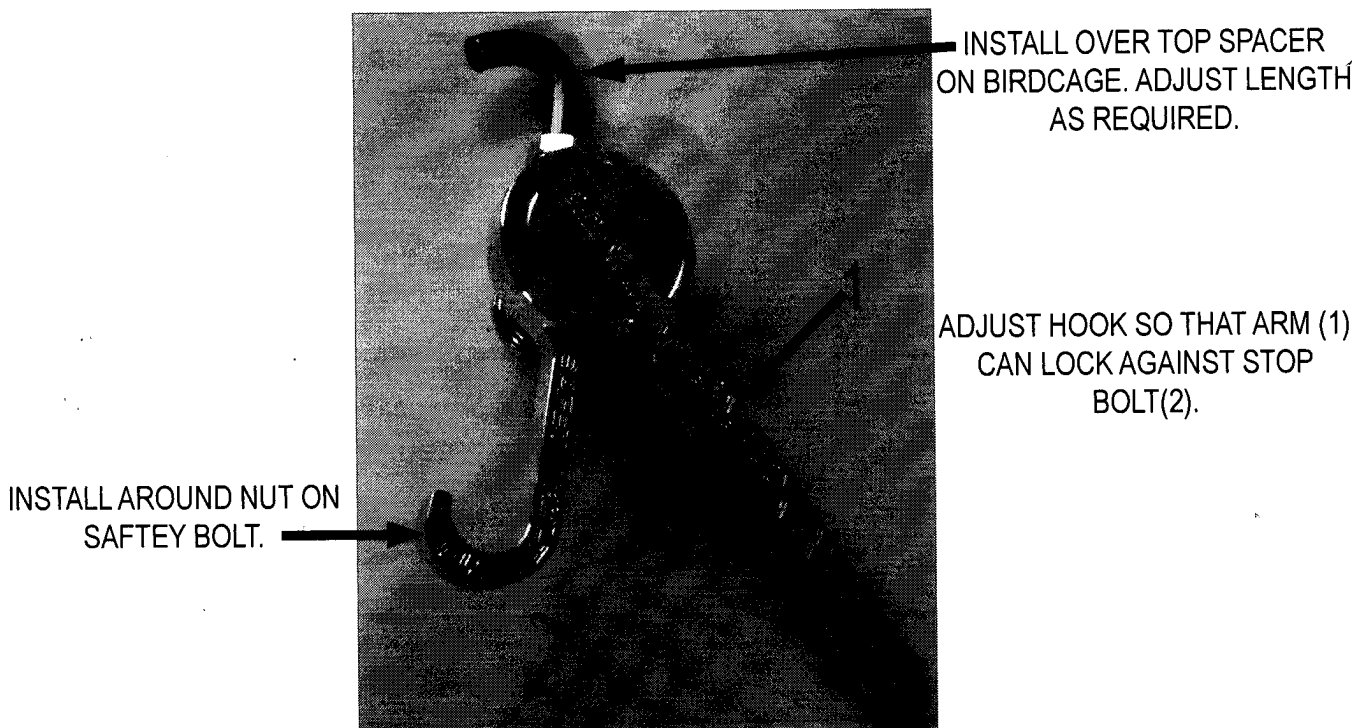

*****CAUTION*****

**DO NOT WORK ON ROLLER UNLESS ARM IS TOUCHING STOP.
*WILL ONLY WORK WITH BRP BIRDCAGES***